


**UL US LISTED**  
 (Wire Hanger)  
 E505554

**Load rating:** [100lbs]. Corresponds with mechanical strength according to UL Standard for Hardware for the Support of Conduit Tubing and Cable, UL2239; Mounting Orientation: Horizontal.

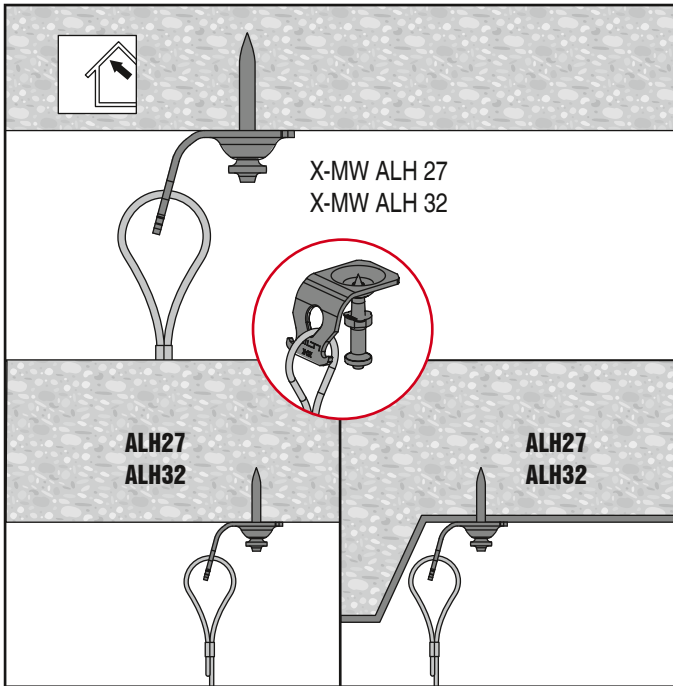

**1.1**

DX 351 CT, DX 351 ME, DX 6 F8, DX 5 F8

**2**

ALH27		ALH32	
DX 351-CT			
DX 351-ME, DX 351-ME + X-PT 351		DX 5 F8, DX 5 F8 + PT 5	
DX 5 F8, DX 5 F8 + PT 5			
DX 6 F8, DX 6 F8 + PT 6		DX 6 F8, DX 6 F8 + PT 6	

**3**

**4**

**5**

h<sub>vs</sub>

15/64" - 7/16"  
 (6mm - 11mm)

**6**

**7**

**8**

10 kg / 22 lbs

Fastener	X-MW ALH
	DX 351 ME / DX 351 CT / DX 5 F8 / DX 6 F8
	X-FG8 ME 351/S351 X-351-F8CT
	6.8/11M

